




TR

Rozwiertak do otworów przelotowych



$\alpha = -33^\circ$

$z = 6$

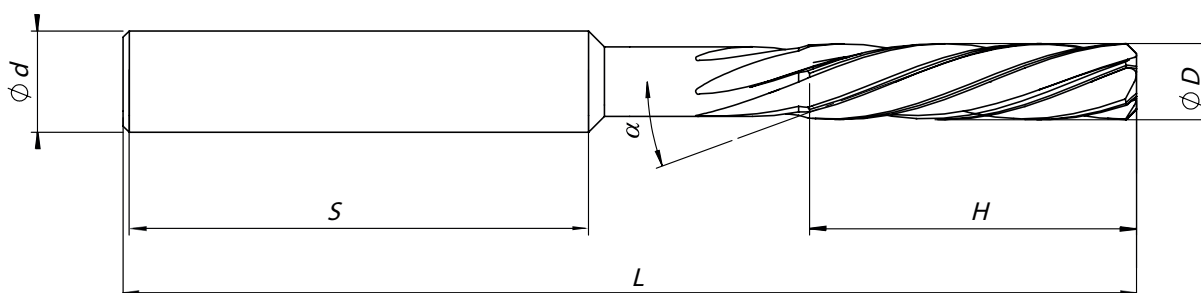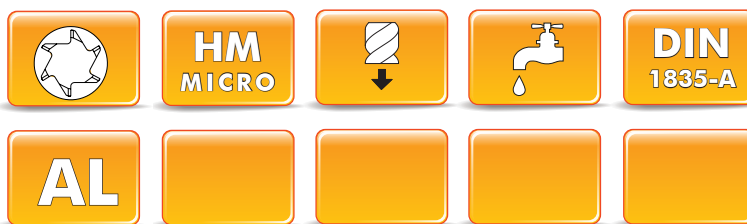

Indeks	D	d	S	H	L	α	z
TR05.00000035.00	4H7	6	30	19	80	-30	6
TR05.00000036.00	5H7	6	30	23	80	-30	6
TR05.00000037.00	6H7	8	30	26	80	-30	6
TR05.00000038.00	7H7	8	30	31	80	-30	6
TR05.00000039.00	8H7	10	30	33	80	-30	6
TR05.00000040.00	9H7	10	27	36	80	-30	6
TR05.00000041.00	10H7	12	27	38	80	-30	6

Wszystkie frezy standardowo produkowane są z chwytem DIN 1835-A. Inne rodzaje chwytów na zamówienie.

Rekomendowane materiały

	Stal	Stal nierdzewna	Żeliwo	Metale nieżelazne	Stopy żaroodporne	Stale zahartowane
✓ Rekomendowany				✓		
✓ Warunkowo						